


## HiPo Series - PAR30

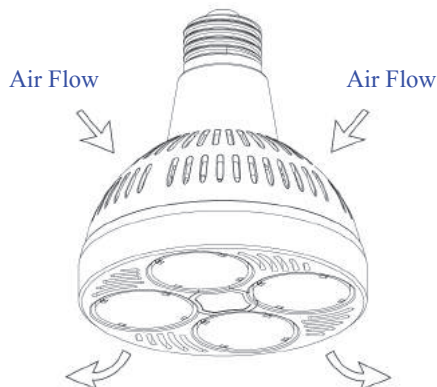

Cooling Fan Technology\*  
• Prolongs life span of the bulb

### Features

- High Power (HiPo) LED bulb - Extremely bright light. (High Lumens)
- Perfect replacement for metal halides and halogens
- Vivid Color - Superior color quality
- Embedded cooling fan technology to ensure long life and decrease rate of decay of LEDs
- 15°, 25°, 45°, 80° beam angles
- Custom CCT possible
- For track fixtures, recessed housing or other indoor/dry applications\*

### Applications

- Retail stores (Jewelry, Clothing, Bags, Electronics, etc)
- Showrooms
- Galleries
- Museums
- Commercial Buildings (lobbies, high ceiling areas)
- Trade shows

### SPECIFICATIONS

<b>Power:</b>	35 W
<b>Input Voltage:</b>	AC 100-240V 50-60Hz
<b>Light Source:</b>	16 High Power LEDs (Osram/Cree)
<b>CCT/Lumens:</b>	3000K - 2200 lm
	6000K - 2800 lm
	7500K - 2300 lm
	3000K/7500K - COMBO** - 2700 lm
	Other CCT - inquire manufacturer
<b>CRI:</b>	>80
<b>Beam Angle:</b>	15°, 25°, 45°, 80°
<b>Dimensions:</b>	95 Ø x 120 H (mm) / 3.74 Ø x 4.72 H (inches)
<b>Life Time:</b>	50,000 hrs
<b>Certifications:</b>	UL, CE, FCC, RoHS
<b>Operating Temp:</b>	-4° ~ 104° (F) / -20° ~ + 40° (C)
<b>Usage:</b>	Indoor/dry location
<b>Socket Base:</b>	E26
<b>Dimmable:</b>	No
<b>Type:</b>	PAR30
<b>Shell Color:</b>	White (black - inquire manufacturer)
<b>Warranty:</b>	2 Years limited warranty

### Ordering Guide:

PAR30-HiPo-	-	-	-
	CCT	Beam Angle	Shell Color
	3000K	15°	WH
	6000K	25°	BK
	7500K	45°	
	3000K/7500K	80°	

Example: PAR30-HiPo-6000K-45°-WH

### Notes

- \* Do not install in airtight environment. Air circulation is required for the cooling fan technology to properly.
- \*\* COMBO CCT - 8 LEDs with 3000K and 8 LEDs with 7500K. Suitable for retail, showroom, gallery and museum applications where showing various colors is of utmost importance.